

**MAX-SERIES™**

**RT-135**

**FORESTRY**

**UNLEASH A  
STAMPEDE  
OF POWER.**



Introducing the MAX-Series™ RT-135 Forestry Posi-Track® loader. Featuring an industry-leading 132hp engine, our most powerful compact track loader delivers more power without compromise while offering a premium operator experience. With forestry-rated guarding and safety features, the RT-135F sets a high-performance benchmark that you have to experience for yourself.

**// BEST-IN-CLASS PERFORMANCE / SUPERIOR POWER / PREMIUM COMFORT**

**asv**

# RT-135 FORESTRY COMPACT TRACK LOADER

## OPERATING SPECIFICATIONS


LOADER ARMS	Radial
OPERATING WEIGHT	12,990 lbs ( 5892 kg )
SHIPPING WEIGHT	11,958 lbs ( 5424 kg )
GROUND PRESSURE AT OPERATING WEIGHT	4.6 psi ( 32 kPa )
RATED OPERATING CAPACITY (35% of tipping load)	4,150 lbs ( 1882 kg )
OPERATING CAPACITY (50% of tipping load)	5,929 lbs ( 2683 kg )
TIPPING LOAD	11,858 lbs ( 5379 kg )
TRAVEL SPEED, MAXIMUM - 1ST SPEED	6.0 mph ( 9.7 kph )
TRAVEL SPEED, MAXIMUM - 2ND SPEED	10 mph ( 16 kph )

## ENGINE

TYPE	Diesel, 4-cylinder, turbo charged
MODEL	Cummins QSF3.8
GROSS POWER RATING	132 hp ( 98.4 kW )
TORQUE, PEAK	360 ft-lb ( 488 Nm )
COOLING SYSTEM	Temperature-controlled, variable speed and operator time-selectable, hydraulically-driven, auto-reversing fan and coolant/anti-freeze-filled radiator
INTAKE AIR CLEANER	Three-stage
EMISSION CONTROLS	Meets all U.S. EPA Tier 4 final standards
STANDARD FEATURE	Auto idle

## UNDERCARRIAGE

TRACK TYPE: General purpose track constructed of rubber compound with embedded co-polymer cords and all-purpose treads.	
TRACK WIDTH	20 in. ( 508 mm )
LENGTH OF TRACK ON GROUND	71 in. ( 1,803 mm )
GROUND CONTACT AREA	2,840 in. <sup>2</sup> ( 1.83 m <sup>2</sup> )
DRIVE SYSTEM	Two hydrostatic direct drive sprockets controlled by a single joystick
TRACK DRIVE SPROCKET	Elevated with low friction, replaceable sprocket rollers
UNDERCARRIAGE SUSPENSION	Two independent torsion axles per undercarriage
ROLLER WHEELS	24 high-density polyurethane and rubber wheels per track. Wheels include sealed bearings
ROLLER WHEEL DIAMETER	Front & rear wheels: 15 in. ( 381 mm ) Middle wheels: 10 in. ( 254 mm )

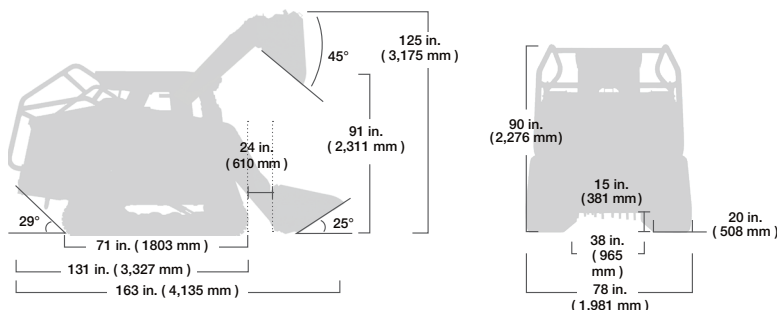

## AUXILIARY HYDRAULIC SYSTEM

PUMP CAPACITY	Low - variable from 0-20 gpm ( 0-75.7 lpm ) High - variable from 30-50 gpm ( 114-189 lpm )
SYSTEM PRESSURE, MAX.	Low - 3,300 psi ( 22,750 kPa ) High - 4,060 psi ( 27,993 kPa )
CONTROLS	Intermittent via joystick button or continuous via console switch. High-flow is adjustable and loader/auxiliary sharing is adjustable via machine display
COUPLERS	Push-to-connect quick couplers mounted on loader arms. Pressure relief valve on coupler block
COOLING SYSTEM	High efficiency side-by-side radiator and oil cooler

## ELECTRICAL SYSTEM

NOMINAL CHARGE	12 V
BATTERY	950 CCA
CHARGING SYSTEM	120 amp alternator
OUTLETS	1-12 V port inside operator station
WIRING	Pre-wired for all factory-available accessories
STANDARD FEATURES	Attachment control kit, block heater

## OPERATOR STATION

SEAT: Adjustable air ride contour vinyl seat with built-in operator presence switch, lap bar and 2 in. ( 51 mm ) wide seat belt, operator manual pouch	
LOADER CONTROL: Right-hand electronic joystick controls loader lift, lower and tilt, plus intermittent control of auxiliary hydraulic. Loader speed is adjustable and selectable from ISO or H control pattern	
DRIVE CONTROL: Left-hand electronic joystick controls machine speed and direction. Track speed is adjustable, includes a Creep Mode and is selectable from ISO or H control pattern	
ENGINE SPEED	Hand-operated throttle and foot throttle
7-INCH COLOR MACHINE DISPLAY: Engine RPM, engine oil pressure, hydraulic oil high temperature, engine coolant temperature, battery voltage, hour meter, fuel level, trip meter, engine diagnostics, system monitoring, fault logging, integrated rear view camera, password protection with user profiles, job clock, maintenance schedules, Def level, Adjustable controls, Adjustable hydraulic flows, winch (optional) control.	
ROPS	ISO 8082-Forestry
FOPS	ISO 8083-Forestry
OPS	ISO 8084-Forestry BC WCB G603 - Window guards for forestry BC WCB G604 - Light duty screen guards for off highway BC WCB G608 - Heavy duty roof structure ISO 6683 - Seat belt anchors CAL OSHA 1596 - Seat belt SAE J2292 - Shoulder restraint (when equipped with 3 point options) ISO 11839 - Forestry thrown object guard
ILLUMINATION	2 - Adjustable forward-facing LED lights 2 - Adjustable rear-facing LED lights 1 - Interior light 2 - LED side lights
CONVENIENCE	12 V power port
STANDARD FEATURES	Horn, backup alarm, cup holder, phone holder, behind seat storage, rear view mirror, lapbar, roof escape hatch, roof panel & rear cab windows. Adjustable joystick & arm rest positions, adjustable directional & air flow HVAC vents, radio with bluetooth & USB, frameless front door, attachment control kit, wiper/washer, beacon switch/outlet, easy-off door