

# TRAKER High-Tip Mini Dumpers



## KEY FEATURES

- VERSATILE HIGH-TIP SYSTEM
- HYDROSTATIC TRANSMISSION
- NARROW UNDERCARRIAGE FOR EASY SITE ACCESS
- SMOOTH RIDE TRACKS SYSTEM
- FOLDING OPERATOR PLATFORM
- AVAILABLE IN DIESEL AND PETROL
- ELECTRIC ENGINE STARTER
- ROBUST AND RELIABLE

# TRAKER HT

## MINI DUMPERS

MADE IN ITALY 

### T60HT

#### ENGINE

Petrol Option	Honda GX270 8.4Hp - Electric Starter
Diesel Option	Yanmar L70N 6.7Hp - Electric Starter

#### TRANSMISSION

Type	Hydrostatic
Travel Speed	4 Km/h
Direction Control	Dual Lever

#### HYDRAULIC SYSTEM

Hydraulic Pump	3x14 l/min Gear Pumps
MAX Pressure	180 Bar / 2610 psi
Hydraulic Cooling System	Air

#### UNDERCARRIAGE

Tracks	180mm wide Rubber Tracks with tensioner
Rollers	3 Rollers with smooth drive rocking system

#### BODY

MAX Capacity	550 Kg
Heaped Capacity	0.23 m3
Struck Capacity	0.18 m3

#### WEIGHT AND DIMENSIONS

Empty Weight	510 Kg
TOT width (A)	680 mm
Length (B)	1400 mm
MAX Tipping Height (C)	1420 mm



### T85HT

#### ENGINE

Petrol Option	Honda GX390 11.7Hp - Electric Starter
Diesel Option	Yanmar L100 10Hp - Electric Starter

#### TRANSMISSION

Type	Hydrostatic
Travel Speed	5 Km/h
Direction Control	Monojoystick Control

#### HYDRAULIC SYSTEM

Hydraulic Pump	2x32 l/min Variable Pistons + 1x14 l/min Gear Pumps
MAX Pressure	180 Bar / 2610 psi
Hydraulic Cooling System	Air

#### UNDERCARRIAGE


Tracks	180mm wide Rubber Tracks with tensioner
Rollers	4 Rollers with smooth drive rocking system

#### BODY

MAX Capacity	700 Kg
Heaped Capacity	0.36 m3
Struck Capacity	0.28 m3

#### WEIGHT AND DIMENSIONS

Empty Weight	600 Kg
TOT width (A)	780 mm
Length (B)	1595 mm
MAX Tipping Height (C)	1420 mm

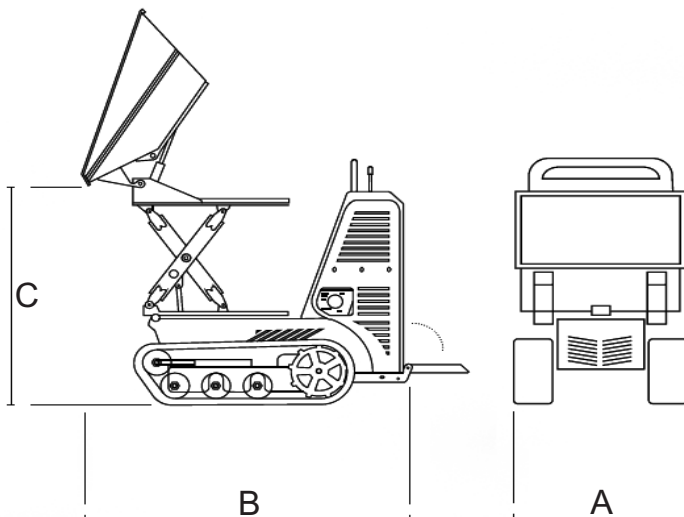

Nimac Pacific reserves the right to modify and update the contents of this at any time. Information and technical data are as available at time of printing.

For further information visit [www.nimacpacific.com.au](http://www.nimacpacific.com.au)

**NIMAC**  
PACIFIC